

STANDARDS DIVISION

July 30, 1957. OTTAWA.

TYPE APPROVAL

PACKARD TYPE "PBD" POLYPHASE WATTHOUR METER

The apparatus specified and illustrated herein has been duly approved by the Standards Division under the provisions of the Electricity Inspection Act, Chapter 94, R.S. 1952, and may be admitted to verification in Canada.

Apparatus Approved: Type "PBD" Polyphase, 2-Element, Switch-board type Watthour Meter, manufactured by the Packard Electric Company Limited, St. Catharines, Ontario.

Rating of Apparatus:

Current Range 0.12 - 10 amperes and 0.25 - 20 amperes

Voltages 115 or 120 volts, and multiples to 575 or 600 volts

Frequency 60 cycles

Wire 3 Phase 3

Description: This is a type "PB" polyphase meter similar to those approved on Circular SD-EA.210 but in a draw-cut frame for switch-board mounting; it may be either flush- or surface-mounted. The instrument may be withdrawn from its case without disturbing the circuit connections; automatic shortcircuiting devices are provided. Internal and external connection diagrams are located inside the case. This meter is approved for use unsealed.

& F. Cower

E. F. Power,


Assistant Director (E&G), Standards Division.

R. W. MacLean Director. Standards Division.

Ref: A-649

		,
		· was
		المردد.

PACKARD TYPE "PBD" POLYPHASE WATTHOUR METER

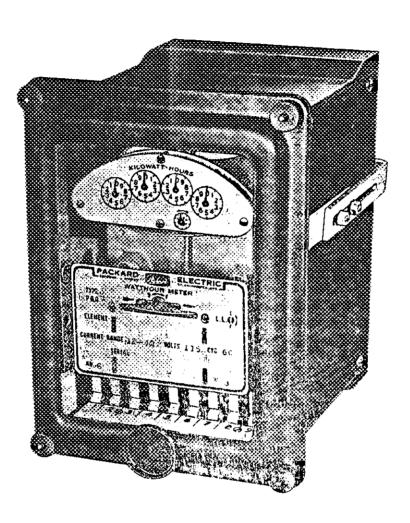

	, -	
		· ·
		¥