



Consumer and
Corporate Affairs

Consommation et
corporations

Standards

Normes

**NOTICE OF APPROVAL
AVIS D'APPROBATION**

E-143

Ottawa, December 22, 1976

CANADIAN GENERAL ELECTRIC TYPE "V-65-2A"
POLYPHASE TOTALIZING WATTHOUR METER

Voltage	120V
Current Range	0.12-10A
Frequency	60 Hz
Secondary Constant (Khs)	3.6
Elements	2 complete 2½ element assemblies
Number of Dials	5, with mask on highest reading dial
Rr	166 2/3
Scale Multiplier	3

DESCRIPTION

The type V-65-2A meter consists of two type V-65, 2½ element meters mounted vertically and driving a common shaft.

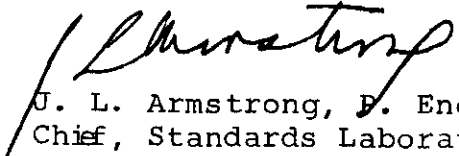
The intended application is for totalizing of two 3-phase, 4-wire, wye circuits. It is essential that the product of the PT and CT ratios is the same for both circuits.

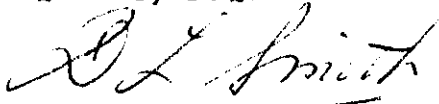
Any approved demand register and pulse initiator may be fitted in which case M and/or W is added to the type designation, e.g. VMW-65-2A.

This meter type is approved for transformer-rated applications. When so used the CT ratio, PT ratio and primary watthour constant must be marked on the nameplate.

Approval Granted to:

Canadian General Electric Co. Ltd.,
1130 Boulevard Charest West,
Quebec, P.Q.


J. L. Armstrong, P. Eng.,
Chief, Standards Laboratory,


D.L. Smith, P. Eng.,
Chief, Electricity & Gas Division,
Metrology and Laboratory Services

Ref: G 6565-C2-47

