

DEPARTMENT OF TRADE AND COMMERCE

STANDARDS DIVISION

OTTAWA Jamary 11th, 1957

APPROVAL LISTING

Retail Gasoline Dispenser - manufactured by Wayne Pump Company, 629 Richmond St.W., Toronto, Ont.

Under the provisions of the Weights and Measures Act, Chapter 292, R.S.C. 1952, and Regulations thereunder (P.C.6894), the apparatus specified and illustrated herein have been listed as approved devices and may be used in Canada in accordance with the conditions applicable.

Apparatus Listed: Computing gasoline dispensers, models 605 and 600 with maximum

capacities of 15 G.P.M. with 1/2 H.P. motor and 20 G.P.M. with

3/4 H.P. motor.

Application:

Dispensing gasoline in retail trade.

Conditions:

As prescribed in P.C. 6894.

Description:

These devices are computing type meter pumps equipped with Veeder-Root registering heads and inter-locking device. The meter is a positive displacement type with rotary valve and

double acting reciprocating pistons.

The motor may be either 1/2 H.P. or 3/4 H.P. The pumping unit, motor, air eliminator, check and pressure relief valves and strainer are located within a common aluminum housing. The motor is so located in this housing that the gasoline circulating around it acts as a coolant. The rating of the motor may be either 1/2 H.P. or 3/4 H.P. A single protruding sight glass is located on the side of the dispenser casing. The gallonage delivered is indicated by gallons and decimals of the gallon. Models

600 and 605 differ only in the means of hose retraction.

Testing:

The standard tests for a retail gasoline dispenser shall apply.

C 9 PHILITPS

Assistant Director (WAM),


Standards Division.


Director.

Standards Division.

Reference:

A-430

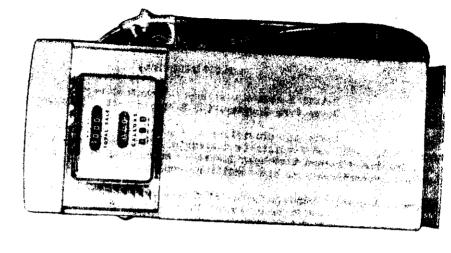

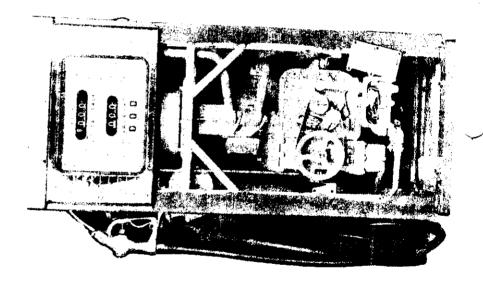

15/el 605